

SP 200® with Industrial Control Center *Robotic Prescription Dispensing System*

ScriptPro's SP 200 Robotic Prescription Dispensing System with Industrial Control Center integrates with third-party industrial conveyor systems to automate the prescription dispensing process on a large scale.

The system contains 200 dispensing cells, which are easily calibrated on-site by users. It dispenses tablets and capsules of all shapes and sizes into standard pharmacy vials and bottles. Because the system fills directly from the dispensing cells, there is no drug cross-contamination. Barcodes are used throughout the filling and replenishment process for accuracy and quality control.



The conveyor system delivers a puck containing a prelabeled prescription vial to a designated pick-up/drop-off location. The SP 200 retrieves the vial from the puck and fills the prescription robotically. Once filling is complete, the SP 200 returns the prescription to the puck and notifies the third-party system that the prescription is ready for pick-up. The SP 200 also sends the dispensed quantity to the third-party computer system, keeping inventory current.

The SP 200 with Industrial Control Center is a robust, flexible, and accurate prescription filling solution for pharmacies using industrial conveyor systems.




ScriptPro®

Pharmacy Automation


For more information call: 800.606.7628 • 913.384.1008 • www.scriptpro.com

SP 200[®] with Industrial Control Center


Top View

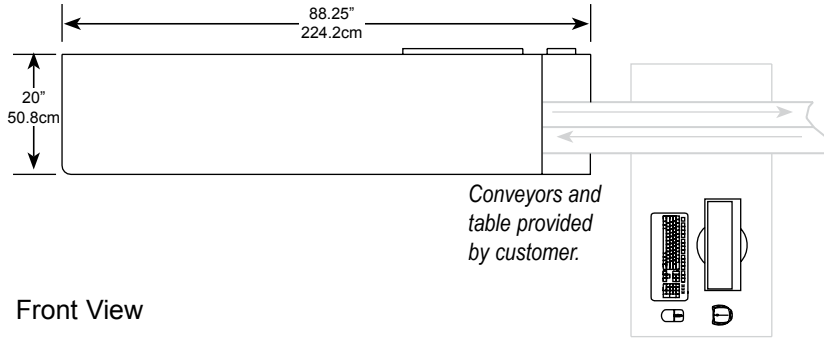

Front View

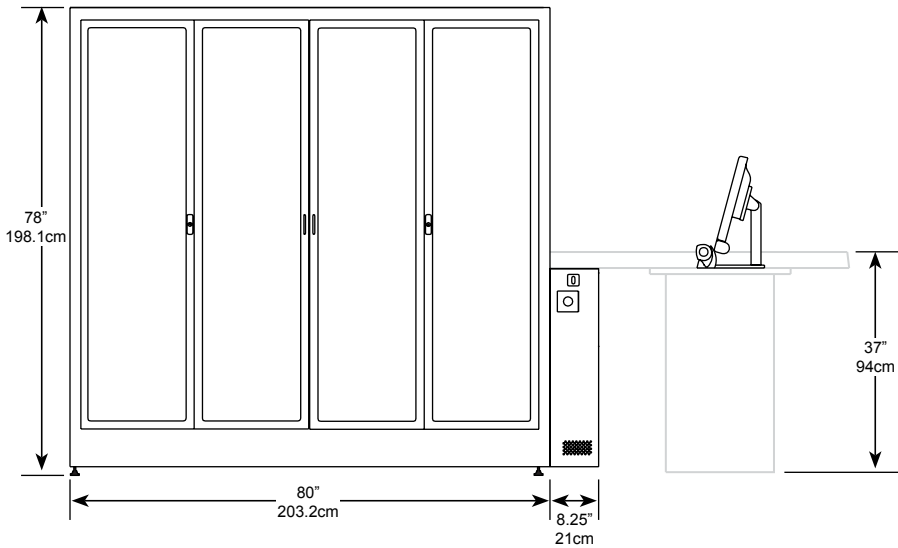

Side View

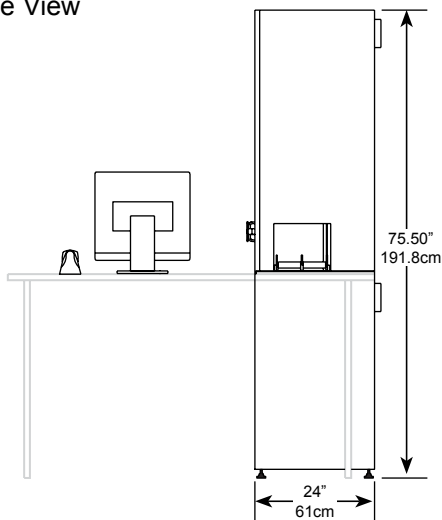

Specifications*

Weight: Robotics Cabinet: 970 lbs (440 kg)

Robot Footprint: 11.25 sq. ft. (1.05m²)

Electrical Input: *North American specs.*
International specs available upon request.

120 VAC ±10%, 60 Hz, 6.0 AMP, 1 Phase
Dedicated outlet located within 5 feet (1.5m) of power connection.

Communications: Serial, parallel or ethernet pharmacy computer connection. Firewall provided for network connectivity.

Remote Support Requirements:

1. VPN over high-speed Internet connection.
Also requires access to backup telephone line as specified in #2 below, such as a fax line.

OR

2. Modem-Dedicated analog RJ-11 telephone outlet accessible to outside line and capable of sending and receiving calls.

Barcode Scanner - Caution: Class IIa Laser Product. Do not stare into beam.
650nm visible laser light diode - .663 mW maximum output.

Computer/Software: Client/Server system on ScriptPro-installed network; Pentium IV-class PC's with dual IDE drives. TCP/IP socket connections; Software built with Visual C++; Windows XP/MSDE. Redundant data and transaction log backups. Customer access limited to SP Central user interface.

Temperatures:

Operating: 41°F to 86°F (5°C to 30°C)

Storage: 5°F to 104°F (-15°C to 40°C)

Dissipated Heat: 1600 BTU/HR max

Cell Capacity:

Single Cell: 676 cc/183 dram

Extended Cell: 1900 cc/514 dram

Peripheral Products Supported:

Wireless Scanner (one per unit)

ANSI Barcode Print Quality Grade: B

*Specifications subject to change without notice.



ScriptPro[®]

Pharmacy Automation

For more information call: 800.606.7628 • 913.384.1008 • www.scriptpro.com

December 2007